

# 27 Port Gigabit Uplink 100M PoE Switch

## **[Introduction]**

27 Ports Gigabit Uplink 100M Ethernet Power Switch (PoE Switch), using high-quality high-speed network IC and the most stable PoE chip, PoE Port support 802.3af and 802.3at standard both, this series of PoE Switch can be 10/100M Ethernet The network provides a seamless connection, and the PoE power port can automatically detect and power the powered devices that comply with the IEEE802.3af or IEEE802.3at standards. The non-PoE device intelligently detects no power and only transmits data.

PoE is Power over Ethernet, which refers to the transmission of data signals to some IP-based terminals (such as IP phones, wireless access APs, network cameras, etc.), but also provides DC power for this device. Technology, these devices that receive DC power are called powered devices.

With simple and convenient installation and maintenance methods and rich business features, it helps users to build a safe and reliable high-performance network. It is mainly located in the core or convergence layer of user networks such as industrial parks, buildings, factories and mines, government agencies, and residential broadband; it can be widely used in Ethernet access scenarios such as small and medium-sized enterprises, Internet cafes, hotels, and schools.

## **[Main Features]**

- 24\*10/100M POE ports + 2\* 10/100/1000M Ethernet Uplink ports+1\* Gigabit SFP Uplink Port ;
- Comply with IEEE 802.3, IEEE 802.3u, IEEE802.3af/at standards ;
- Ethernet port supports 10/100M adaptive and POE functions ;
- Flow control mode: full-duplex adopts IEEE 802.3x standard, half-duplex adopts Back pressure standard ;
- Support port auto flip (Auto MDI/MDIX) ;
- Automatically supplied to adaptive devices ;
- Panel indicator monitoring status and help failure analysis ;

- Support for VLAN mode, OFF mode and Extend mode :

### **【Application Environment】**

- Metro Optical Broadband Network: Data network operators such as telecommunications, cable TV, and network system integration,etc.
- Broadband private network: Suitable for financial, government, oil, railway, electric power, public security, transportation, education and other industries
- Multimedia transmission: Integrated transmission of images, voice and data, suitable for remote teaching, conference TV, videophone and other applications
- Real-time monitoring: Simultaneous transmission of real-time control signals, images and data


### **【Specifications】**

<b>I/O Interface</b>	
Power	Input: AC 100-240V, 50/60Hz
Ethernet	24 *10/100M PoE Port 2* 10/100/1000M Ethernet Uplink ports 1* Gigabit SFP Uplink Port
<b>Performance</b>	
Switching Capacity	9.2Gbps
Throughput	8.035Mpps
Packet Buffer	1.5Mb
MAC Address	2K
Jumbo Frame	9216bytes
Transfer Mode	Store and forward
MTBF	100000 hour
<b>Standard</b>	
Network protocol	IEEE802.3 (10Base-T) IEEE802.3u (100Base-TX) IEEE802.3ab(1000Base-TX) IEEE802.3z(1000Base-FX)

	IEEE802.3x (Flow control)
PoE Protocol	IEEE802.3af (15.4W) IEEE802.3at (30W)
Industry Standard	EMI: FCC Part 15 CISPR (EN55032) class A EMS: EN61000-4-2 (ESD) 、EN61000-4-4 (EFT) Shock: IEC 60068-2-27 Free Fall: IEC 60068-2-32 Vibration: IEC 60068-2-6
Network Medium	10Base-T : Cat3 、 4 、 5 or above UTP(≤100m) 100Base-TX : Cat5 or above UTP(≤100m) 1000Base-TX : Cat5 or above UTP(≤100m)
Optical Media	Multimode fiber : 50/125, 62.5/125, 100/140μm Single mode fiber: 8/125, 8.7/125, 9/125, 10/125μm
<b>Protection</b>	
Security Certificate	CE 、 FCC 、 RoHS
<b>Environment</b>	
Working Environment	Working Temperature : -20~50°C Storage Temperature : -40~85°C Working Humidity : 10%~90% , non-condensing Storage Humidity : 5%~90% , non-condensing Working Height : Maximum 10,000 feet Storage height : Maximum 10,000 feet
<b>Indication</b>	
LED Indicators	PWR (power supply) , SW (DIP) , 1-27 Green (Link&Data)
DIP Switch	<b>VLAN</b> : Port isolation mode. In this mode, the PoE ports (1-24) of the switch cannot communicate with each other, and can only communicate with the UP-link port. <b>Normal</b> : Normal mode, all port can communicate with each other, the transmission distance is within 100 meters, the transmission rate is 10M / 100M adaptive; <b>Extend</b> : Link extension mode, 9-24 ports PoE power supply and data transmission distance can be extended to 250 meters, the transmission rate becomes 10M
<b>Mechanical</b>	
Structure Size	Product Dimension (L*W*H): 320 *210* 46 mm Package Dimension (L*W*H): 370*270 *85 mm N.W : 1.9kg G.W : 2.4kg

Packing Info	Carton MEAS : 490*435*300mm Packing Qty : 6 units Packing Weight : 16KG
Power Voltage	Input Voltage : AC 100-240 V Power supply : 52V5.76A
Package List	Switch 1 pcs, Power cord 1 pcs, User manual 1 pc, Warranty card 1 pc, Brackets 1 pair(Selectable)
Ordering Info	
ZX901-AF-2421GS	27 Port Gigabit Uplink 100M PoE Switch

**[Product Picture]**

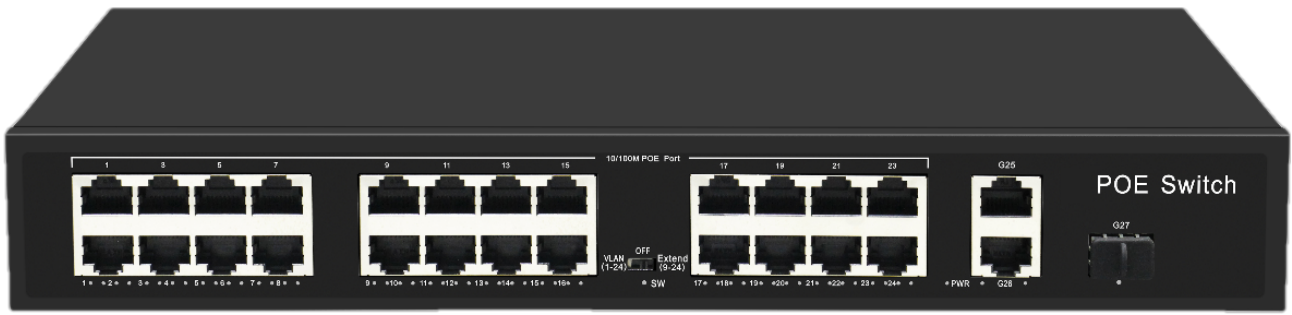

**[Application]**

